

Specification


Interclamp Headwall Kits are meticulously crafted using components from the robust Interclamp D48 range of fittings combined with durable galvanized steel tubes. Both the Interclamp fittings and the steel tubes galvanised in accordance with AS 1074:1989, ensuring a high level of corrosion resistance and long-term durability.

To further enhance the lifespan of the fittings, they receive an additional secondary double coating. This advanced coating process not only bolsters the product's resistance to environmental wear and tear but also provides an aesthetically pleasing finish

General Arrangement

Supplied in convenient 3-metre lengths, our galvanised steel tubes offer maximum flexibility on-site. Easily cut to your required size, they ensure a perfect fit and hassle-free assembly every time. Each kit includes a detailed technical drawing that serves as a step-by-step guide for assembling the structure.

To further simplify the installation process, suitable fixings are included in the kit. These robust fixings are designed to be versatile and suitable for use in a wide range of construction materials

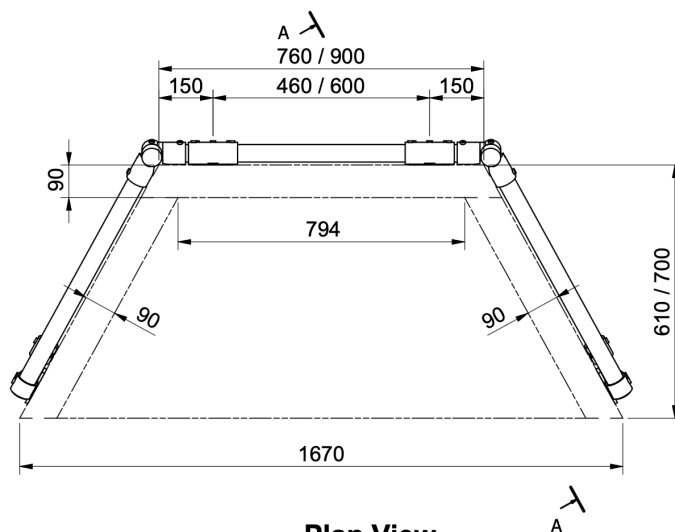

**Figures given as guidance only, dimensions and weights are subject to manufacturing tolerances.*

Specification Overview

Hot Dipped Galvanised (Interclamp Fittings & Tube)
AS 1074:1989

Optional Powder Coating

Interclamp Headwall Kits can be powder coated at an extra cost in a wide variety of RAL & AS standard colours.

Assembly Service

We offer a comprehensive assembly service that includes the accurate positioning of fittings on the posts to ensure quick and easy installation. For detailed information and pricing options, feel free to reach out to us directly.